




418.00 EUR  
incl. 19% VAT, plus [shipping](#)

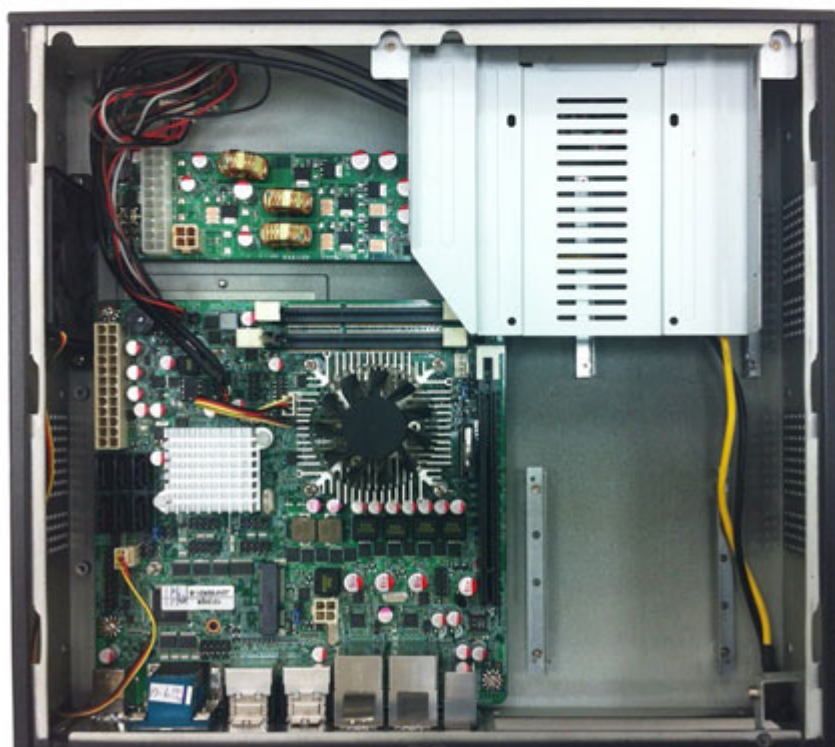

- AMD eTrinity R272F Processor (FS1r2 Socket) with A75 FCH (Hudson D3) Chipset
- Support DirectX 11 3D Graphics Acceleration
- Support 6 \* Serial ATA3 (6Gb/s) Devices with RAID 0, 1 & 10
- Support 2 \* SO-DIMM DDR3 1600 Dual Channel up to 16GB
- Integrated Realtek ALC662 HD Audio CODEC with 6-CH
- Support 4 \* HDMI Output Displays
- Supports 2 \* Realtek RT8111EVL Gigabit LAN
- Support CPU Smart FAN
- Mini-ITX Form Factor(170mm x 170mm)

|                                  |                                                                                                                                                                                                         |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Model No</b>                  | <b>JBC128F83-272-B</b>                                                                                                                                                                                  |
| <b>Motherboard Specification</b> |                                                                                                                                                                                                         |
| <b>CPU</b>                       | • Support AMD eTrinity R272F Processor (2.70GHz, Dual Core, FS1r2 Socket)                                                                                                                               |
| <b>Chipset</b>                   | • AMD A75 FCH Hudson D3 Chipset                                                                                                                                                                         |
| <b>Memory</b>                    | <ul style="list-style-type: none"> <li>• Dual Channel DDR3 memory technology</li> <li>• 2 x DDR3 1600 un-buffered memory SO-DIMM slots</li> <li>• Max. capacity of system memory up to: 16GB</li> </ul> |

|                                |                                                                                                                                                                                                                |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>LAN</b>                     | <ul style="list-style-type: none"> <li>2 * Realtek RTL8111EVL LAN chip</li> <li>PCI-Ex1 Gigabit LAN 10/100/1000 Mb/s</li> <li>Support PXE</li> </ul>                                                           |
| <b>Audio</b>                   | <ul style="list-style-type: none"> <li>Realtek ALC662 Audio CODEC</li> <li>5.1 CH HD Audio with Content Protection</li> </ul>                                                                                  |
| <b>Storage</b>                 | <ul style="list-style-type: none"> <li>6 * Serial ATA3 6Gb/s connectors support RAID 0, 1 &amp; 10 functions</li> </ul>                                                                                        |
| <b>USB</b>                     | <ul style="list-style-type: none"> <li>8 * USB 2.0 ports (4 distribute in back panel, 4 distribute in mid-board)</li> <li>4 * USB 3.0 ports (2 distribute in back panel, 2 distribute in mid-board)</li> </ul> |
| <b>BIOS</b>                    | AMI EFI 64Mb SPI Flash ROM                                                                                                                                                                                     |
| <b>Form Factor</b>             | Mini-ITX Form Factor, M/B 170 x 170mm                                                                                                                                                                          |
| <b>Barebones Specification</b> |                                                                                                                                                                                                                |
| <b>Specs Exposed</b>           | 1 x Slim ODD Drive Bay (Optional: 1 x 2.5" Drive Bay)<br>Hidden: 2 x 2.5" HDD Drive Bay                                                                                                                        |
| <b>Colors</b>                  | Black Color                                                                                                                                                                                                    |
| <b>Cooling Fan</b>             | Side: 6cm Fan x 2                                                                                                                                                                                              |
| <b>Front I/O Port</b>          | 2 x USB 2.0<br>1 x 4 in 1 card reader (shared with one front USB 2.0 port)                                                                                                                                     |
| <b>Rear I/O Port</b>           | 4 x USB 2.0/1.1 ports<br>2 x USB 3.0 ports<br>4 x HDMI Ports<br>2 x RJ-45 Ports<br>3 x Audio jacks (Line In / Line Out / Microphone)                                                                           |
| <b>Power supply</b>            | 19V 150W DC-DC Power Converter board                                                                                                                                                                           |
| <b>Standard Accessory</b>      | 19V 120W AC-DC Adapter x1 and Power Cord x1<br>PCI-E x 16 Riser card x1<br>Wall Mount Bracket x2<br>CD x1 and Manual x1                                                                                        |
| <b>Functional</b>              | Digital Signage, KIOSK, Advertising, Menu Boards, TV Walls, Traffic Intelligent Monitoring, Surveillance                                                                                                       |
| <b>Packing</b>                 | Gross Weight ■ 4.385KG, Net Weight ■ 3.70KG                                                                                                                                                                    |
| <b>Certificate</b>             | CE, FCC For Barebone<br>CE, FCC, TUV, UL, CCC, CB For Power Adapter                                                                                                                                            |